

type number	for width of cable tray (mm)	thickness of metal sheet (mm)	weight (kg/pc)	amount of bolts for connection (pc)	🔥
<b>SU 35_S</b>	35	1	0,23	4	
<b>SU 35_F</b>			0,27		
<b>SU 60_S</b>	60	1	0,30	4	🔥
<b>SU 60_F</b>			0,34		🔥
<b>SU 60_ZM</b>			0,30		🔥
<b>SU 85_S</b>	85	1	0,36	8	
<b>SU 85_F</b>			0,42		
<b>SU 110_S</b>	110	1	0,44	8	🔥
<b>SU 110_F</b>			0,51		🔥
<b>SU 110_ZM</b>			0,44		🔥

## product description:

It is used for making an additional branching use an unequal T-piece or cross.

Advantage of this using is availability to choose bending tray with any width.

The reduction piece is delivered in singles, must be used 2 pieces for installation.

The connection is performed using the bolts NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with F and ZM surface finish.

These items can also be ordered in a varnished version.

## surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

## sales amount:

1 pc

## meets the requirements: ČSN EN 61537:02

## classification 🔥:

ČSN 73 0895 P 90-R

DIN 4102-12 E 90

STN 92 0205 PS 90




Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

## storage:

ČSN EN 60721-3-1

length of cut out side wall  
of the tray for branch

width of cable tray	D
50	250
100	300
150	350
200	400
300	500
400	600
500	700
600	800

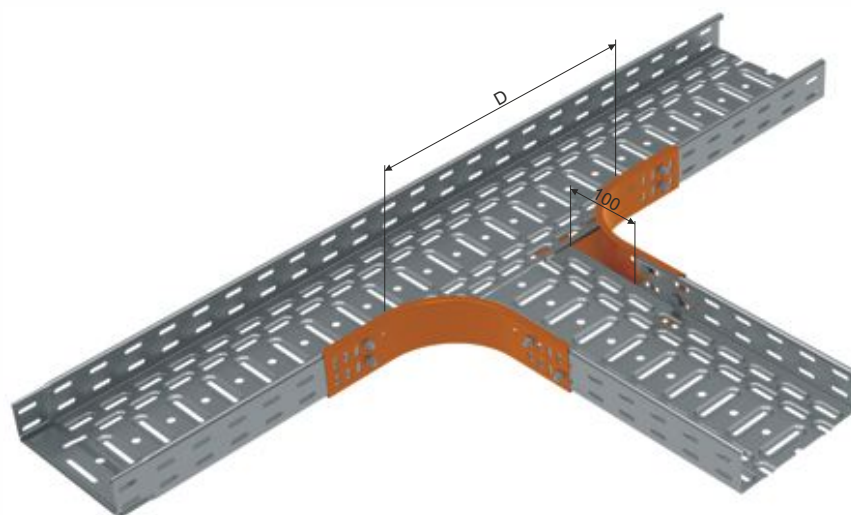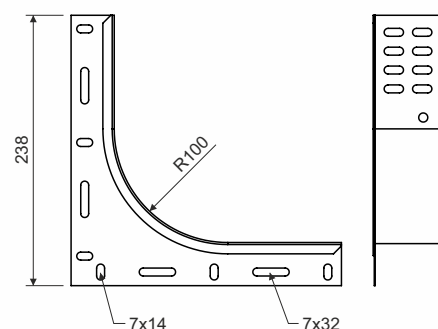

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



reduktion piece



cardboard