

type number	A (mm)	height H (mm)	for height of cable tray / ladder (mm)	thickness of metal sheet (mm)	weight (kg/pc)	amount of bolts for connection (pcs)	🔥
SK 35_S	133	28	35	0,80	0,05	4	
SK 35_ZM				0,75			
SK 50_S	146	43	50	0,80	0,09	4	🔥
SK 50_ZM				0,75			🔥
SK 60_S	155	53	60	0,80	0,10	4	🔥
SK 60_ZM				0,75			🔥
SK 85_S	178	78	85	1,20	0,24	8	
SK 85_ZM							
SK 100_S	191	93	100	1,20	0,32	8	🔥
SK 100_ZM							🔥
SK 110_S	200	103	110	1,20	0,35	8	🔥
SK 110_ZM							🔥

product description:

The hinged join is used to create bends of any angle in cable trays running through JUPITER cable trays or cable ladders.

The coupling is supplied by 1 piece; must be used 2 pieces for installation. The couplings to be used on the right or left side do not differ.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

ZM surface finish joins shall be used for ZM or F surface finish trays.

GMT surface finish bolts shall be used for ZM or F surface finish trays.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm

ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount:

á 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥:

ČSN 73 0895 P 90-R




DIN 4102-12 E 90

STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage:

ČSN EN 60721-3-1

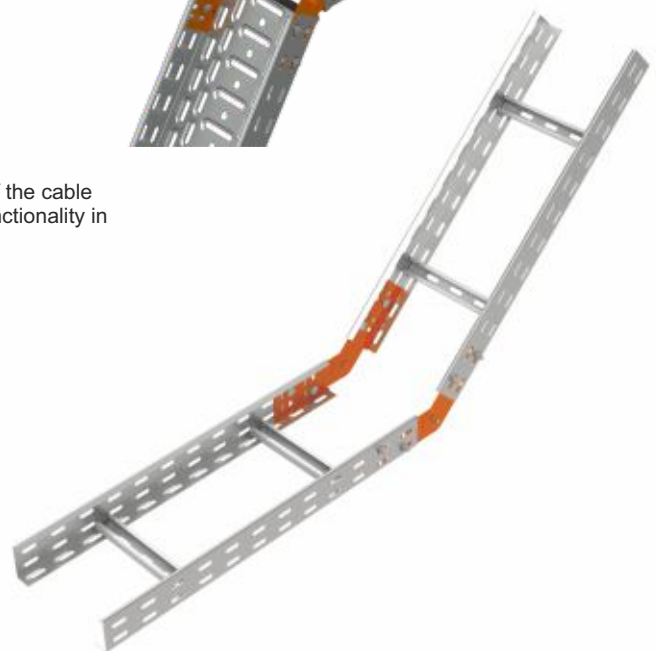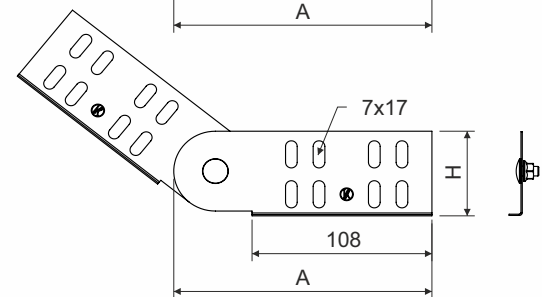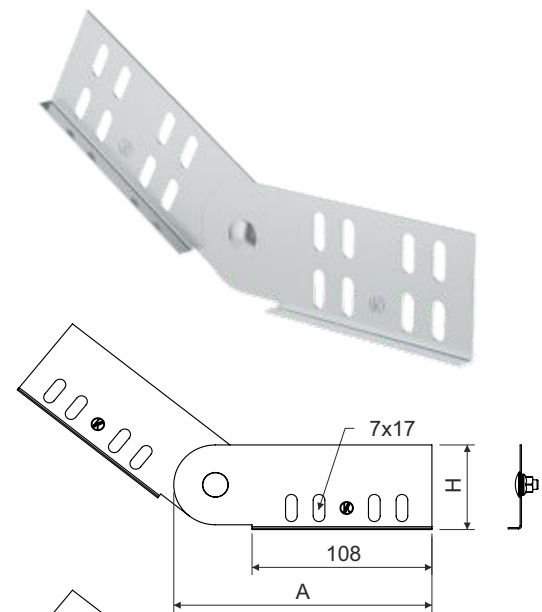

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



SK