

item number	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
NIXSUK 50_IX	46	0,8	0,8	🔥
NIXSUK 100_IX	96	0,8	0,8	🔥

product description:

Angle couplings are mostly used at places where the route is slightly bended, for large bending radiuses or for the circumvention of columns and pillars.

The advantage of an angle coupling is that it makes it easy to create a break in a tray of almost any angle.

To fix the connection use the bolt NIXSM 6X10. To protect the cables, the bolt head is inside the cable tray.



material:

IX - stainless steel AISI 304  
(AISI 316, AISI 316L only to order)

sales amount:

á 1 pc

meets the requirements:

ČSN EN 61537:02


classification 🔥:

ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire .

storage:

ČSN EN 60721-3-1

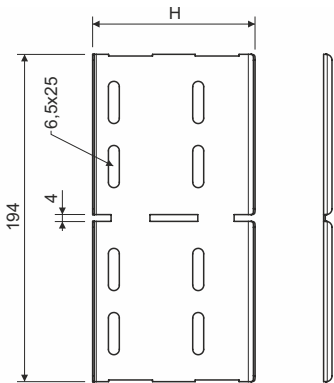

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NIXSUK