

type number	width of cable ladder (mm)	weight (kg/pc)
KPBSKL 150_PO	150	0,54
KPBSKL 150_POF		0,62
KPBSKL 200_PO	200	0,68
KPBSKL 200_POF		0,78
KPBSKL 200_POZM		0,68
KPBSKL 300_PO	300	0,94
KPBSKL 300_POF		1,08
KPBSKL 300_POZM		0,94
KPBSKL 400_PO	400	1,19
KPBSKL 400_POF		1,37
KPBSKL 400_POZM		1,19



height of cable ladder: 60 mm

thickness of metal sheet: 1,5 mm

product description: This cable coupling is suitable for connecting standardized constructions of cable ladders by NSM 6X10 screws.

surface finish:


PO - Pre-Galvanized, zinc-layer 15 - 27 µm

POF - Hot Dip Galvanized, average zinc-layer 55 µm (min. 45 µm)

POZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: á 1 pc

meets the requirements: EN 61537:02




klasifikace  ČSN 73 0895P 90-R

DIN 4102-12 E 90

STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: EN 60721-3-1

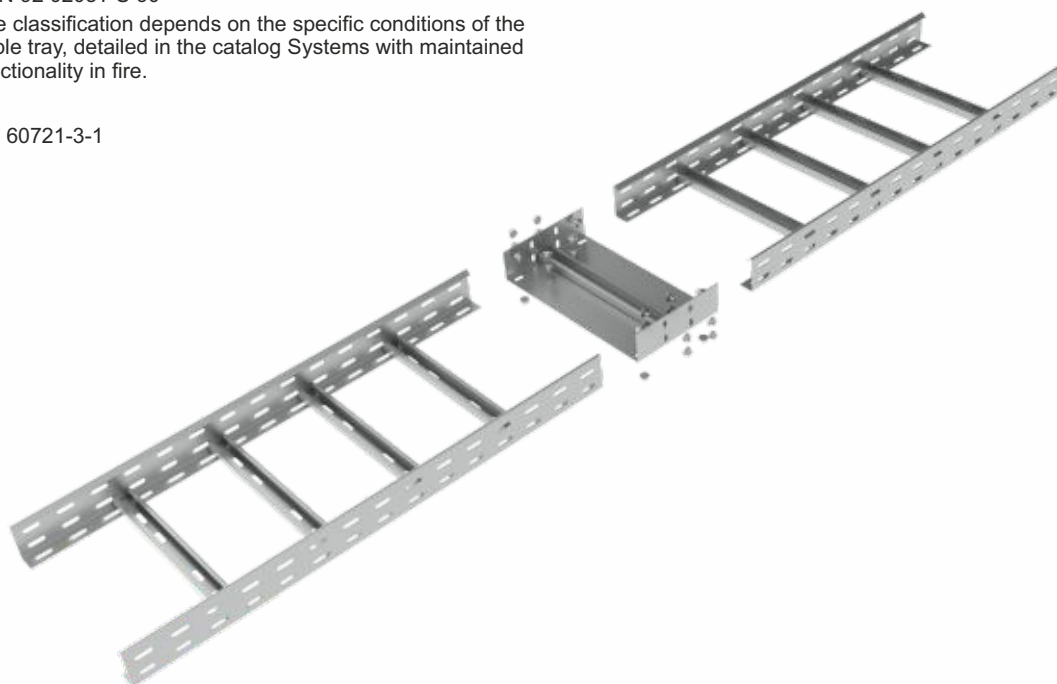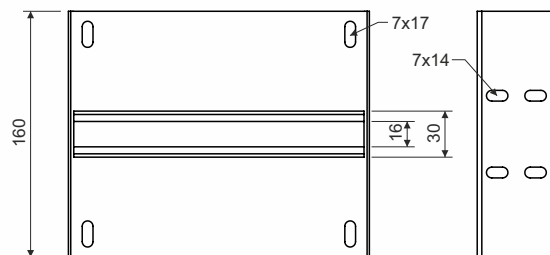

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



KPBSKL