
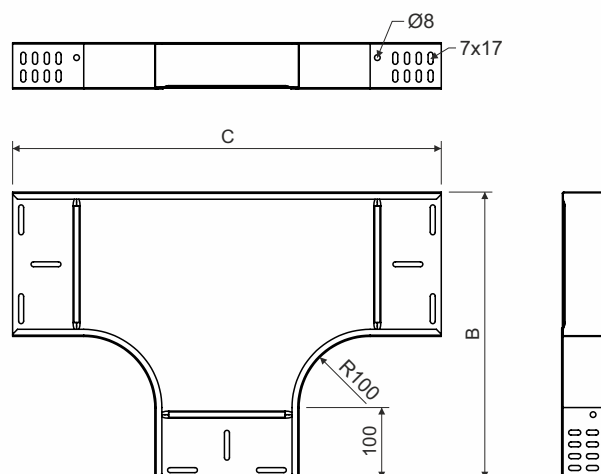


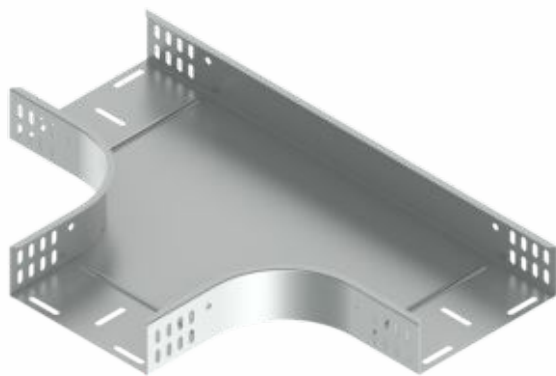

product description: The T-piece is used to branch of cable trays running through JUPITER cable trays or cable ladders of the same width. To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with F and ZM surface finish. These items can also be ordered in a varnished version.


surface finish:
 S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

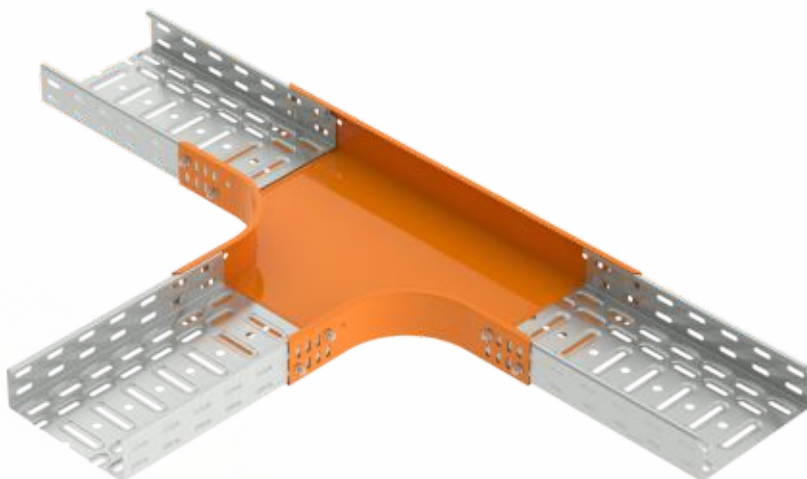

type number	for width of cable tray (mm)	for height of cable tray (mm)	B (mm)	C (mm)	thickness of metal sheet (mm)	weight (kg/pc)	amount of bolts for connection (pc)	🔥
T 35X50_S	50	35	253	453	0,8	0,74	12	
T 35X50_F						0,85		
T 35X75_S	75	35	278	478	0,8	0,86	12	
T 35X100_S	100	35	303	503	0,8	0,99	12	
T 35X150_S	150	35	353	553	0,8	1,27	12	
T 35X200_S	200	35	403	603	1,0	1,89	15	
T 35X300_S	300	35	503	703	1,0	2,81	15	
T 60X50_S	50	60	253	453	0,8	0,88	12	🔥
T 60X50_F					0,8	1,02		🔥
T 60x50_ZM					0,75	0,78		🔥
T 60X75_S	75	60	278	478	0,8	1,07	12	🔥
T 60X100_S	100	60	303	503	0,8	1,14	12	🔥
T 60X100_F					0,8	1,33		🔥
T 60x100_ZM					0,75	1,04		🔥
T 60X150_S	150	60	353	553	0,8	1,43	12	🔥
T 60X150_F						1,66		🔥
T 60X200_S	200	60	403	603	1,0	2,08	15	🔥
T 60X200_F						2,42		🔥
T 60x200_ZM						2,08		🔥
T 60X300_S	300	60	503	703	1,0	3,02	15	🔥
T 60X300_F						3,51		🔥
T 60x300_ZM						3,02		🔥
T 60X400_S	400	60	603	803	1,0	4,13	18	🔥
T 60X400_F						4,79		🔥
T 60x400_ZM						4,13		🔥
T 60X500_S	500	60	703	903	1,0	5,34	18	🔥
T 60x500_ZM						5,34		🔥
T 60X600_S	600	60	803	1003	1,2	8,07	18	🔥
T 85X100_S	100	85	303	503	0,8	1,45	24	
T 85X150_S	150	85	353	553	0,8	1,93	24	
T 85X200_S	200	85	403	603	1,0	2,43	27	
T 85X300_S	300	85	503	703	1,0	3,39	27	
T 85X400_S	400	85	603	803	1,0	4,51	30	
T 110X150_S	150	110	353	553	0,8	1,86	24	🔥
T 110X150_F						2,15		🔥
T 110X200_S	200	110	403	603	1,0	2,57	27	🔥
T 110X200_F						2,98		🔥
T 110x200_ZM						2,57		🔥
T 110X300_S	300	110	503	703	1,0	3,55	27	🔥
T 110X300_F						4,12		🔥
T 110x300_ZM						3,55		🔥
T 110X400_S	400	110	603	803	1,0	4,60	30	🔥
T 110X400_F						5,34		🔥
T 110x400_ZM						4,60		🔥
T 110X500_S	500	110	703	903	1,0	5,98	30	🔥
T 110X500_F						6,94		🔥
T 110x500_ZM						5,98		🔥
T 110X600_S	600	110	803	1003	1,2	8,71	30	🔥
T 110X600_F						10,11		🔥

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



T-piece