


type number	for width of cable tray (mm)	A (mm)	B (mm)	C (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
VT 50_S						0,55	0,22	🔥
VT 50_F	50	50	254	453	12	0,80	0,36	🔥
VT 50_ZM						0,75	0,30	🔥
VT 75_S	75	75	279	478	12	0,55	0,30	🔥
VT 100_S						0,55	0,39	🔥
VT 100_F	100	100	304	503	12	0,80	0,65	🔥
VT 100_ZM						0,75	0,52	🔥
VT 150_S						0,55	0,57	🔥
VT 150_F	150	150	354	553	12	0,80	0,97	🔥
VT 200_S						0,80	1,14	🔥
VT 200_F	200	200	404	603	12	0,80	1,33	🔥
VT 200_ZM						0,75	1,05	🔥
VT 300_S						1,00	2,32	🔥
VT 300_F	300	300	504	703	12	1,00	2,69	🔥
VT 300_ZM						1,00	2,32	🔥
VT 400_S						1,00	3,40	🔥
VT 400_F	400	400	604	803	15	1,00	3,95	🔥
VT 400_ZM						1,00	3,40	🔥
VT 500_S						1,00	4,62	🔥
VT 500_F	500	500	704	903	15	1,00	5,36	🔥
VT 500_ZM						1,00	4,62	🔥
VT 600_S						1,00	6,00	🔥
VT 600_F	600	600	804	1003	15	1,00	6,96	🔥

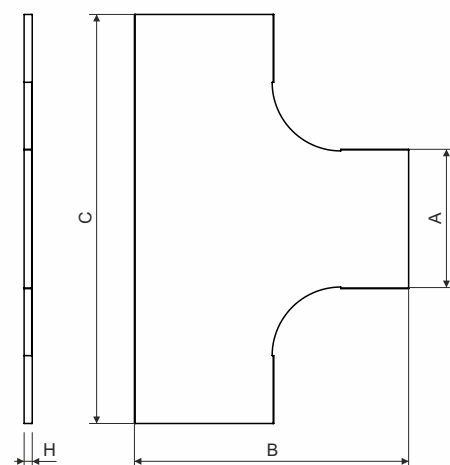

product description:

This cover is used to cover the T-piece.

To fix the cover use 6 pcs of cover fixtures VU or NUV.

These items can also be ordered in varnished version.

surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount:

1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥:

ČSN 73 0895P 90-R


DIN 4102-12E 90

STN 92 0205PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage:

ČSN EN 60721-3-1

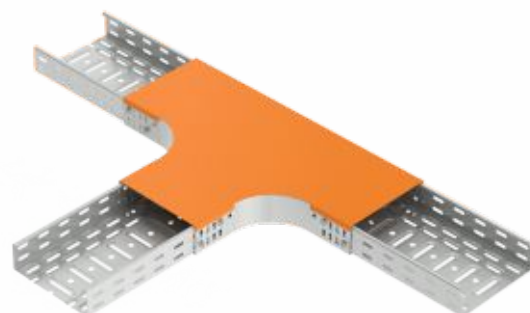

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



T-piece cover