




type number	thickness of metal sheet (mm)	weight (kg/m)
<b>NU 30x30_S</b>	1,00	0,80
<b>NU 30x30_F</b>	1,00	0,93
<b>NU 30x30_ZM</b>	1,00	0,80

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm  
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)  
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 2000 mm

storage: ČSN EN 60721-3-1

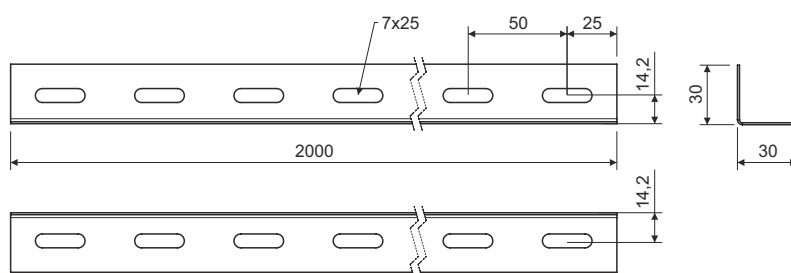

## WARNING

### Risk of injury from cutting

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

### Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

### Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



supporting corner



stretch film