

type number:

VU_GMT

product description: Is used for a bolt free attachment of the cover to the tray, ladder or to the accessories.

Non-perforated trays have holes specifically for these cover fixture.

The cover fixture is placed to the cover and the sidewall in the place of the opening and it is slightly pressed so that the fixture lock slides into the opening.

surface finish: GMT - GEOMET, non electrolytic plating, aluminum-zinc-layer 5-15 µm (equivalent Hot Dip Galvanized)

sales amount: 50 pc


classification 🔥: ČSN 73 0895 P 90-R

DIN 4102-12 E 90

STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

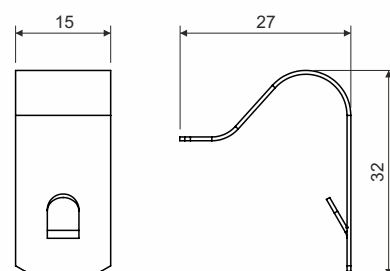

 WARNING**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



VU



cardboard



plastic bag